


TUNG-SOL

TWIN TRIODE
MINIATURE TYPE


GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 0.35 AMP.
12.6 VOLTS 0.175 AMP.

AC OR DC

ANY MOUNTING POSITION


BOTTOM VIEW
MINIATURE BUTTON
9 PIN BASE

9A

THE 5751WA IS A RUGGEDIZED, HIGH MU TWIN TRIODE OF THE NINE-PIN MINIATURE CONSTRUCTION. THE TWO TRIODE SECTIONS ARE ELECTRICALLY INDEPENDENT, ALLOWING SIMULTANEOUS USE OF THE TWO IN COMPLETELY DIFFERENT APPLICATIONS. THE HEATER CENTER-TAP PERMITS OPERATION FROM EITHER A 6.3 OR 12.6 VOLT SUPPLY. THE 5751WA IS ADAPTABLE TO LOW LEVEL INPUT APPLICATIONS WHERE HIGH VOLTAGE GAIN AND LOW HEATER POWER ARE IMPORTANT CONSIDERATIONS. OTHER GENERAL APPLICATIONS INCLUDE VOLTAGE AMPLIFIERS, PHASE INVERTERS, AND MULTIVIBRATORS. CONTROLS ON THE PRODUCT AVERAGE FOR SUCH CHARACTERISTICS AS PLATE CURRENT, TRANSCONDUCTANCE AND AMPLIFICATION FACTOR ASSURE THAT THESE CRITICAL CHARACTERISTICS WILL REMAIN WELL CENTERED. SINCE IT MUST BE ABLE TO WITHSTAND SEVERE MECHANICAL TESTS TO MEET TEST SPECIFICATIONS, THE 5751WA IS ESPECIALLY SUITED FOR USE IN MILITARY OR INDUSTRIAL AIRBORNE EQUIPMENT WHICH MAY BE SUBJECTED TO SEVERE SHOCK AND VIBRATION.

DIRECT INTERELECTRODE CAPACITANCES

	WITHOUT SHIELD	
GRID TO PLATE #1 (RATED)	1.4	$\mu\mu f$
MAXIMUM	1.70	$\mu\mu f$
MINIMUM	1.10	$\mu\mu f$
GRID TO PLATE #2 (RATED)	1.4	$\mu\mu f$
MAXIMUM	1.70	$\mu\mu f$
MINIMUM	1.10	$\mu\mu f$
INPUT (RATED)	1.4	$\mu\mu f$
MAXIMUM	1.70	$\mu\mu f$
MINIMUM	1.10	$\mu\mu f$
OUTPUT (SECTION #1) (RATED)	0.46	$\mu\mu f$
MAXIMUM	0.70	$\mu\mu f$
MINIMUM	0.22	$\mu\mu f$
OUTPUT (SECTION #2) (RATED)	0.36	$\mu\mu f$
MAXIMUM	0.54	$\mu\mu f$
MINIMUM	0.18	$\mu\mu f$

RATINGS

ABSOLUTE MAXIMUM VALUES

HEATER VOLTAGE	6.3 \pm 10%	12.6 \pm 10% VOLTS
MAXIMUM DC PLATE VOLTAGE	330	VOLTS
MAXIMUM PLATE DISSIPATION (EACH SECTION)	0.8	WATT
MAXIMUM HEATER-CATHODE VOLTAGE	\pm 100	VOLTS
MAXIMUM DC CATHODE CURRENT (EACH SECTION)	22	mA
MAXIMUM BULB TEMPERATURE	\pm 165	$^{\circ}$ C

CONTINUED ON FOLLOWING PAGE

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A_1 AMPLIFIER — EACH TRIODE SECTION

HEATER VOLTAGE	6.3	12.6	6.3	12.6	VOLTS
HEATER CURRENT	0.35	0.175	0.35	0.175	AMP.
PLATE VOLTAGE		100		250	VOLTS
AMPLIFICATION FACTOR		70		70	
GRID BIAS VOLTAGE		-1		-3	VOLTS
PLATE RESISTANCE		58 000		58 000	OHMS
TRANSCONDUCTANCE		1 200		1 200	μ MHOS
PLATE CURRENT		0.8		1.0	mA

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

 $E_f = 12.6V$, $E_b = 250Vdc$, $E_c = -3Vdc$
 (EXCEPT AS MODIFIED BELOW)

	INITIAL				500 HOUR LIFE TEST				
	INDIVIDUAL MIN.	MAX.	PROD. MIN.	AVG. MAX.	INDIVIDUAL MIN.	MAX.			
HEATER CURRENT	160	190	---	---	160	190			mA
HEATER-CATHODE LEAKAGE ^A ($E_{hk} = \pm 100Vdc$)	---	± 10	---	---	---	± 10			μ Adc
GRID CURRENT (1) ($R_g = 1.0$ MEG.)	0	-0.4	---	---	0	-0.4			μ Adc
PLATE CURRENT (1)	0.4	1.8	0.7	1.3	---	---			mA
AC AMPLIFICATION ^B ($E_{bb} = 100Vdc$, $E_c = 0$, $E_{sig} = 0.2Vac$, $R_p = 0.5$ MEG, $R_g = 10$ MEG.)	7.5	---	---	---	6.5	---			Vac
INSULATION OF ELECTRODES ^C ($E_f = 12.6V$, $E(g-all) =$ $100Vdc$, g neg., $E(p-all) =$ $300Vdc$, p neg.)									
	$R(g-all)$	500	---	---	250	---			MEGOHMS
	$R(p-all)$	500	---	---	250	---			MEGOHMS
PLATE CURRENT (2) ($E_c = -10.5Vdc$)	---	10	---	---	---	---			μ Adc
PLATE CURRENT (1) DIFFERENCE BETWEEN SECTIONS	---	0.6	---	---	---	---			mA
TRANSCONDUCTANCE (1)	900	1600	1075	1325	---	---			μ MHOS
Δ TRANSCONDUCTANCE (2) ^D ($E_f = 11.4V$)	---	15	---	---	---	---			PERCENT
GRID CURRENT (2) ^E ($E_f = 14V$)	0	-1.5	---	---	---	---			μ Adc
AMPLIFICATION FACTOR	55	85	62	78	---	---			

SPECIAL REQUIREMENTS

	MIN.	MAX.	
VARIABLE FREQUENCY VIBRATION ^{FA} ($R_p = 10,000$)	---	100	mVac
VIBRATIONAL FATIGUE ^G	---	---	
SHOCK ^H (HAMMER ANGLE = 42° , $E_{hk} = 100Vdc$, HEATER POS., $R_g = 0.1$ MEG)	---	---	
POST SHOCK AND VIBRATIONAL FATIGUE TEST END POINTS	---	---	
LOW FREQUENCY VIBRATION	---	150	mVac
HEATER-CATHODE LEAKAGE	---	± 30	μ Adc
AC AMPLIFICATION	6.5	---	Vac
GRID CURRENT (1)	0	-0.6	μ Adc
GLASS STRAIN ^J	---	---	
CONTINUITY AND SHORT ^K	---	---	
NOISE AND MICROPHONICS ^{LAMN} ($E_f = 12.6Vac$, $E_{hk} = 0$, $E_{bb} = 300Vdc$, $E_c = 0$, $R_p = 0.1$ MEG.)	---	100	mVac

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

SPECIAL REQUIREMENTS - CONT'D.

	MIN.	MAX.	
LOW FREQUENCY VIBRATION ^{OA} ($R_p = 2000$)	---	100	mVac
LOW PRESSURE VOLTAGE BREAKDOWN ^P (PRESSURE = 55 ± 5 mm mercury, TEMP. = $25 \pm 5^\circ\text{C}$, HUMIDITY = 0, VOLTAGE = 500 Vac, 60 CYCLES, SINUSOIDAL WAVEFORM)	500	---	Vac
1 HOUR STABILITY LIFE TEST (INTERMITTENT LIFE TEST CONDITIONS)	---	---	
STABILITY LIFE TEST END POINTS	---	---	
Δ TRANSCONDUCTANCE (1)	---	10	PERCENT
100 HOUR SURVIVAL RATE LIFE TEST (INTERMITTENT LIFE TEST CONDITIONS OR EQUIVALENT	---	---	
HEATER CYCLING LIFE TEST ($E_f = 7.5\text{V}$, $E_{hk} = 135\text{Vdc}$, HEATER POSITIVE, $E_{c1} = E_b = 0$)	---	---	
HEATER CYCLING LIFE TEST END POINTS HEATER CATHODE LEAKAGE	---	± 20	μAdc
INTERMITTENT LIFE TEST ($E_{hk} = 135\text{Vdc}$, HEATER POSITIVE, $R_g = 0.5\text{ MEG.}$, MIN. BULB TEMPERATURE = 165°C)	---	---	

NOTES

^A TIE 1_p TO 2_p , 1_g TO 2_g , 1_k TO 2_k . (PARASITIC SUPPRESSORS OF 50 OHMS MAXIMUM PERMITTED.

^B SEE MIL-E-1C 4.10.11.2

^C SEE MIL-E-1C 4.8.2

^D THE VALUE OF TRANSCONDUCTANCE (2) SHALL APPLY TO INDIVIDUAL TUBES AND IS EXPRESSED;

$$\frac{(\text{SM AT 12.6}) - (\text{SM AT 11.4})}{(\text{SM AT 12.6})} \times 100$$

^E PRIOR TO THIS TEST, TUBES TO BE PREHEATED FIVE (5) MINUTES AT CONDITIONS INDICATED. TEST IMMEDIATELY AFTER PRE-HEATING. $E_f = 14.0\text{V}$, $E_{c1} = -3.0\text{Vdc}$, $R_{hk} = 0\text{ OHMS}$, $E_b = 250\text{Vdc}$, $R_g/g = 0.5\text{ MEG.}$

^F SEE MIL-E-1C 4.9.20.3

^G SEE MIL-E-1C 4.9.20.6

^H SEE MIL-E-1C 4.9.20.5

^J GLASS STRAIN TEST CONSISTS OF COMPLETELY SUBMERGING THE TUBE INTO BOILING WATER (97°C - 100°C) FOR A PERIOD OF 15 SECONDS, THEN IMMEDIATELY PLUNGING INTO COLD WATER ($0^\circ\text{C} \pm 3^\circ\text{C}$). THE AMOUNT OF WATER SHALL BE AT LEAST (2) LITERS PER 15 TUBES. TUBES FOR THIS TEST SHALL HAVE BEEN EXHAUSTED A MINIMUM OF 48 HOURS PRIOR TO PERFORMANCE OF THIS TEST. REJECT FOR EVIDENCE OF AIR LEAK.

^K SEE MIL-E-1C 4.7.5

^L SEE MIL-E-1C 4.10.3.5



^M TIE CATHODES TOGETHER AND GROUND THRU A 1500 OHM RESISTOR. GRIDS ARE GROUNDING.

^N THE CATHODE RESISTOR SHALL BE SHUNTED WITH A CAPACITIVE REACTANCE NOT EXCEEDING 3 OHMS @ 60 CYCLES.

^O SEE MIL-E-1C 4.9.20.4

^P BREAKDOWN SHALL BE DEFINED AS THE VOLTAGE AT WHICH ARCING OCCURS BETWEEN ANODE BASE PIN AND ADJACENT PINS.

5751WA
PREMIUM TUBE

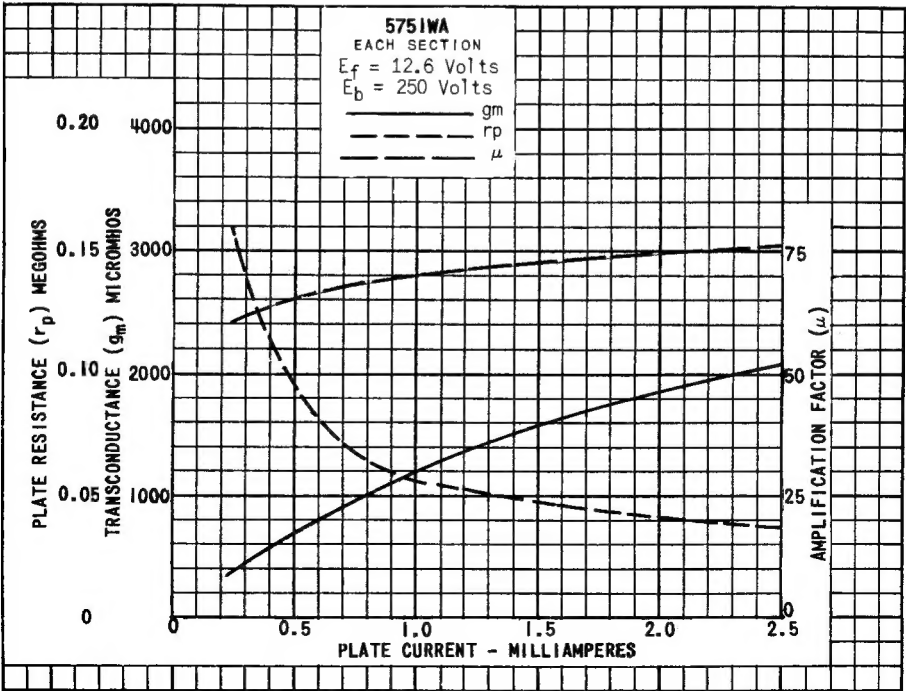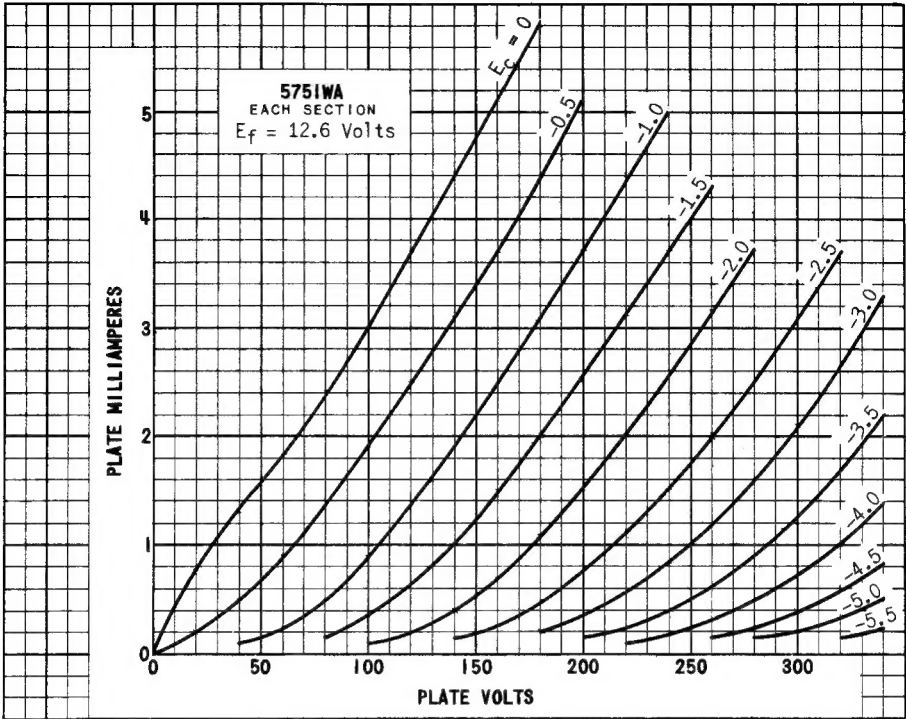

5751WA
EACH SECTION
 $E_f = 12.6$ Volts

